




HIGH TEMPERATURE RIBBON SERIES FUSION SPLICE PROTECTION SLEEVE

Splice Technologies' HIGH TEMPERATURE "RIBBON" Series fusion splice protection sleeve is designed for 2-12 ribbon fiber and to work in elevated temperature environments well beyond the temperature range of conventional splice protectors. These sleeves have been developed for use in "**downhole**" Oil and Gas industry applications where a continuous operating temperature resistance of **160° C** is required. They also encompass outstanding abrasion and cut-through protection, high dielectric strength, and are highly resistant to most industrial fuels making them ideal for other harsh environments and high reliability applications. Stock lengths are 30 and 40mm with a maximum after shrink diameter of **5.2mm**. This product is constructed with a meltable adhesive inner tube, heat shrink outer tube, and a glass strength member. The entire assembly is clear to allow viewing of the fiber during and after splicing. We are proud to say that all of our products are made here in the **USA**, and most splice sleeves are in stock ready for prompt delivery.

FEATURES

- Bellcore GR-1380 Compliant
- RoHS & REACH Compliant
- Clear outer tube meets SAE AMS-DTL-23053/8
UL & CSA VW-1 rating
- Inner meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Open ended assembly minimizing possibility of air entrapment during heat shrinking
- Operating Temperature Range -55 to 175°C
- Packaged in 10 per bag

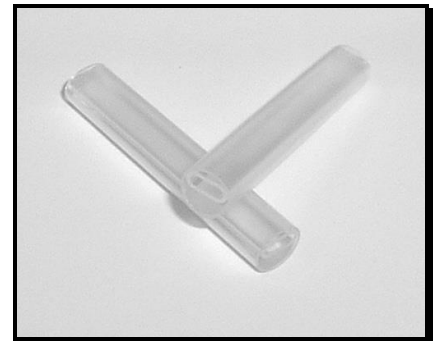

PART NUMBER KEY

MFSS-SQH30 30mm length
MFSS-SQH40 40mm length

FOR ORDERS AND QUOTES

Phone: 1-631-924-8108
Fax: 1-631-924-8109
Email: sales@splicetechnologies.com
Website: www.splicetechnologies.com