




STANDARD SERIES FUSION SPLICE PROTECTION SLEEVE

Splice Technologies' "Standard" series fusion splice protection sleeve represents the industry's most popular sleeve due to its robust design and user friendly size. Stock lengths are 40 & 60mm, but also available in 32mm. All with an after shrink diameter of **2.9mm** and will accommodate fiber diameters up to **1.4mm**. This product is constructed with an inner EVA meltable adhesive tube, stainless steel strength member and a polyolefin heat shrink outer tube. The tubes are clear to allow viewing of the fiber during and after splicing. The entire assembly is designed to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the **USA** and most sleeves are in stock ready for immediate delivery.

FEATURES

- Bellcore GR-1380 Compliant
- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Full length strength member for total fiber support
- Close dimensional tolerances
- Open ended assembly minimizing possibility of air entrapment during shrinkage
- Operating Temperature Range -55°C to +110°C
- Packaged in 50 per bag

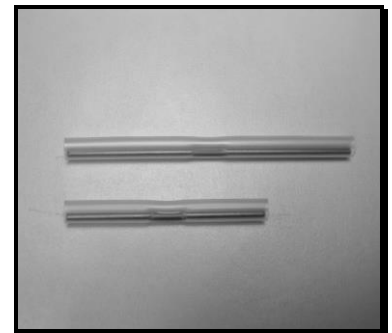

PART NUMBER KEY

FSS-SC32 32mm length
FSS-SC40 40mm length
FSS-SC60 60mm length

FOR ORDERS AND QUOTES

Phone: 1-631-924-8108
Fax: 1-631-924-8109
Email: sales@splicetechnologies.com
Website: www.splicetechnologies.com