




“Z” SERIES FUSION SPLICE PROTECTION SLEEVE

Splice Technologies’ “Z” Series is the smallest fusion splice protection sleeve currently offered in the industry, with an after shrink diameter of **1.2mm**, (0.047 inches), and offered in lengths of 10, 15, 20, and 25mm. Designed for use with bare, or up to **450** micron diameter coated fiber, they are ideal for splitter/coupler packaged products, or similar applications where space is limited. This product is constructed with an EVA meltable adhesive inner tube, a polyolefin heat shrink outer tube, and a stainless steel strength member. The tubes are clear to allow viewing of the fiber during and after splicing. This product has been proportionately downsized using the same core materials, formulations and manufacturing processes that are used in our “Standard” series product. The entire assembly is designed to ensure that all members maintain perfect alignment during shipping, handling and shrinking. We are proud to say that all of our products are made here in the **USA** and most sleeves are in stock ready for immediate delivery.

FEATURES

- RoHS & REACH Compliant
- Outer tube meets SAE AMS-DTL-23053/5 Class 2
- Inner EVA meltable adhesive tube
- Close dimensional tolerances
- Full length strength member for total fiber support
- Open ended assembly minimizing possibility of air entrapment during heat shrinking
- Operating Temperature Range -55°C to +110°C
- Packaged in 100 per bag

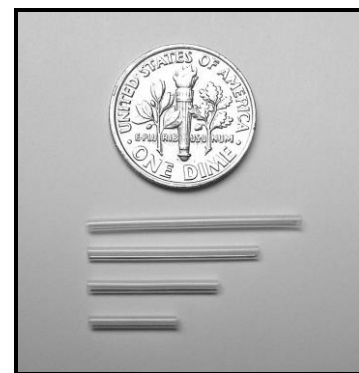

PART NUMBER KEY

FSS-ZC10	10mm length
FSS-ZC15	15mm length
FSS-ZC20	20mm length
FSS-ZC25	25mm length

FOR ORDERS AND QUOTES:

Phone: 1-631-924-8108
Fax: 1-631-924-8109
Email: sales@splicetechnologies.com
Website: www.splicetechnologies.com